


MODEL CXVA120CRS4CR

TOP

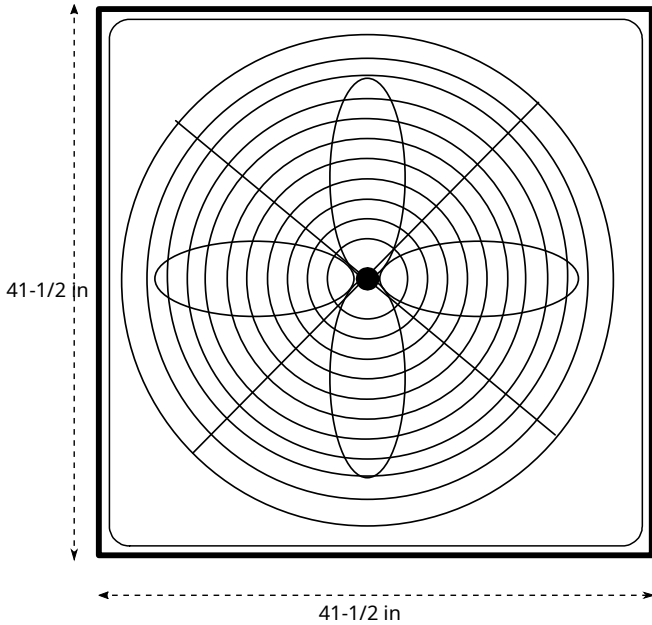


SPECIFICATIONS:

- 120,000 BTU/HR at 90F ambient & 55F water out
- 60,000 BTU/HR Estimated at 90F ambient & 28F water out (With LT)
- Electrical: 460V, 60hz three phase
- Minimum Circuit Ampacity: 27, Maximum Fuse Size 42 Amps
- (1) 40G insulated stainless steel tank
- (1) 1-1/2 HP water pump: 59 GPM max, 51 PSI max
- R-32 Refrigerant (Fully charged and tested)
- (2) Copeland scroll compressors
- Approximate shipping weight 825 LBS
- Dimensions: 41-1/2" wide, 41-1/2" long, 69-1/2" tall
- Decibels: 76

*** OPTIONS:**

- Low Temp (28F LWT)
- Expansion Ports
- Low Level Alarm
- Upgraded Insulation
- Controller Extension (+15')
- External Drain Port
- High Pressure Bypass Valve
- 2-Stage Controller

FRONT

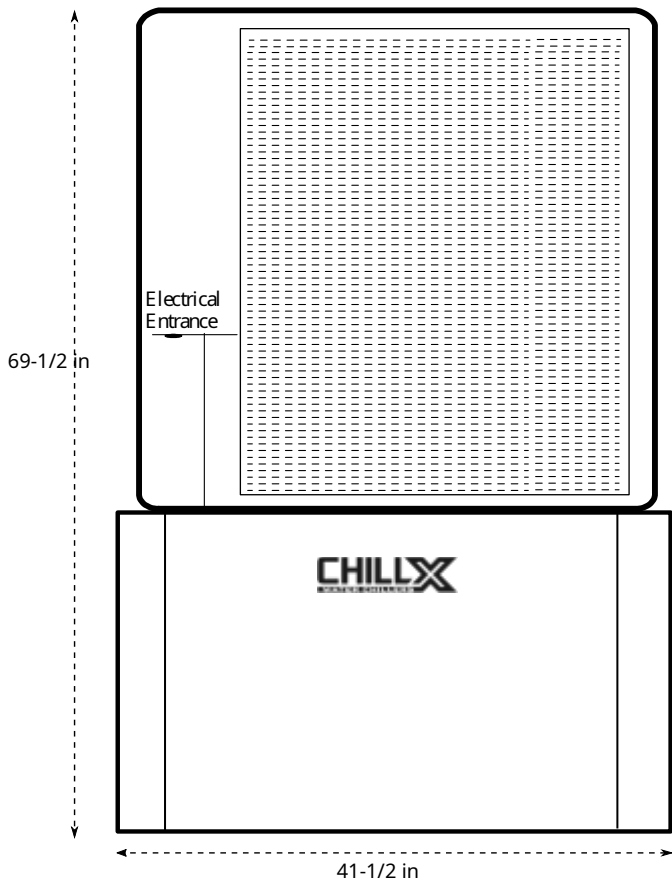

RIGHT

