


MODEL CXPA240CND4

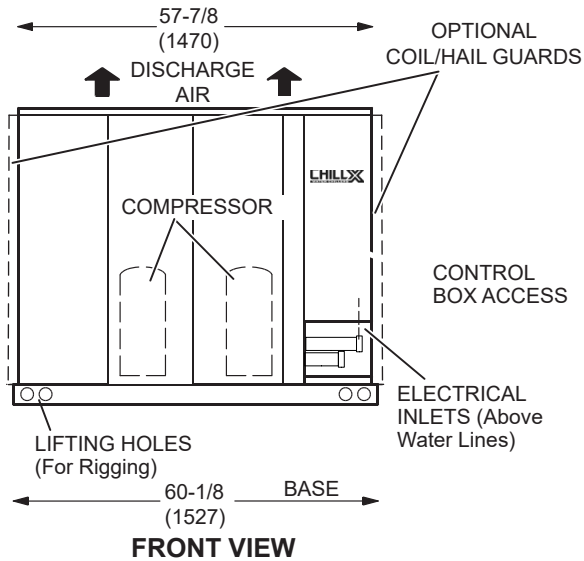

SPECIFICATIONS:

- 240,000 BTU/HR at 95F ambient and 55F water out
- 120,000 BTU/HR at 95F ambient and 28F water out (With LT)
- Electrical: 460V, 60hz three phase
- Min Circuit Ampacity: 39, Max Fuse Size: 50 Amps
- (2) Brazed plate evaporators
- (2) Copeland scroll compressors
- R-454b Refrigerant
- 2-Stage Thermostatic Controller
- 1-1/2" FNPT Water Connections (Default)
- All ETL/UL Listed Components
- Approximate shipping weight 1190 LBS
- Dimensions: 88-3/4" long, 60-1/8" wide, 48-3/4" tall
- Decibels: 84

OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Hail Guards
- 2" FNPT Water Connections
- 4-Stage Controller
- Controller Extension Cord (+15')

