


## MODEL CXVA048CRS4CR

TOP

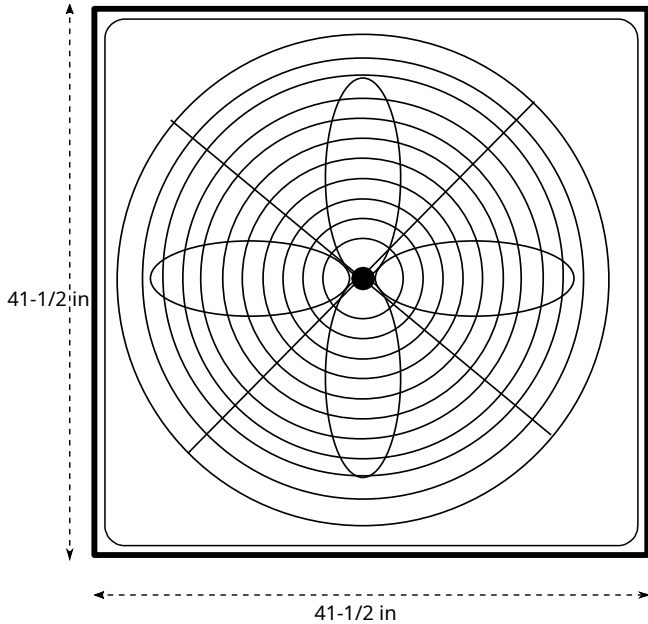


**SPECIFICATIONS:**

- Low temperature chiller
- 48,000 BTU/HR at 90F ambient & 55F water out
- 24,000 BTU/HR Estimated at 90F ambient & 28F water out (With LT)
- Electrical: 460V, 60hz three phase
- Minimum Circuit Ampacity: 11, Maximum Fuse Size 16 Amps
- (1) Copeland scroll compressor
- (1) Insulated 36G stainless steel tank with
- (1) 1 HP water pump: 47 GPM max, 47 PSI max
- R-32 Refrigerant [Fully Charged & Tested]
- Approximate shipping weight 740 LBS
- Dimensions: 41-1/2" wide, 41-1/2" long, 64" tall
- Decibels: 76

**OPTIONS:**

- Extra Insulation
- Expansion Ports
- Low Level Alarm
- Low Temp (25-28F LWT)
- Controller Extension Cord (+15')
- High Pressure Bypass Valve

FRONT

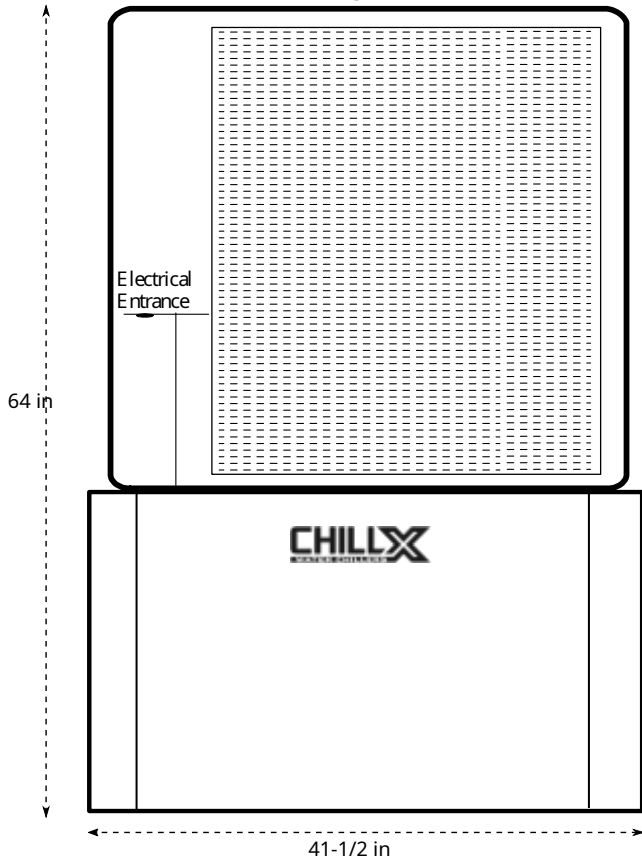

REAR

