


MODEL CXCA072CRS3

SPECIFICATIONS:


- 72,000 BTU/HR at 55F LWT and 90F ambient
- 36,000 BTU/HR at 28F LWT and 90F ambient (With LT)
- Electrical: 208/230V, 60hz three-phase
- Min Circuit Ampacity: 34 Amps, Max Fuse Size: 52 Amps
- (1) 65G insulated stainless steel tank
- (1) 1-1/2 HP water pump: 59 GPM max, 51 PSI max
- (1) 2-Stage Copeland scroll compressor
- R-410a Refrigerant (R-32 available on request)
- Approximate shipping weight 850 LBS
- Dimensions: 48-1/4" wide, 74" long, 43-3/4" tall
- Decibels: 78

OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Two-stage Thermostatic Control
- Low Level Alarm
- Expansion Ports
- Extra Tank Insulation
- Controller Extension Cord (approx 15')
- Hail Guards
- Dry-Chiller Add-on (Adds blower and hydronic coil)
- Secondary Pump
- Caster Wheel Kit

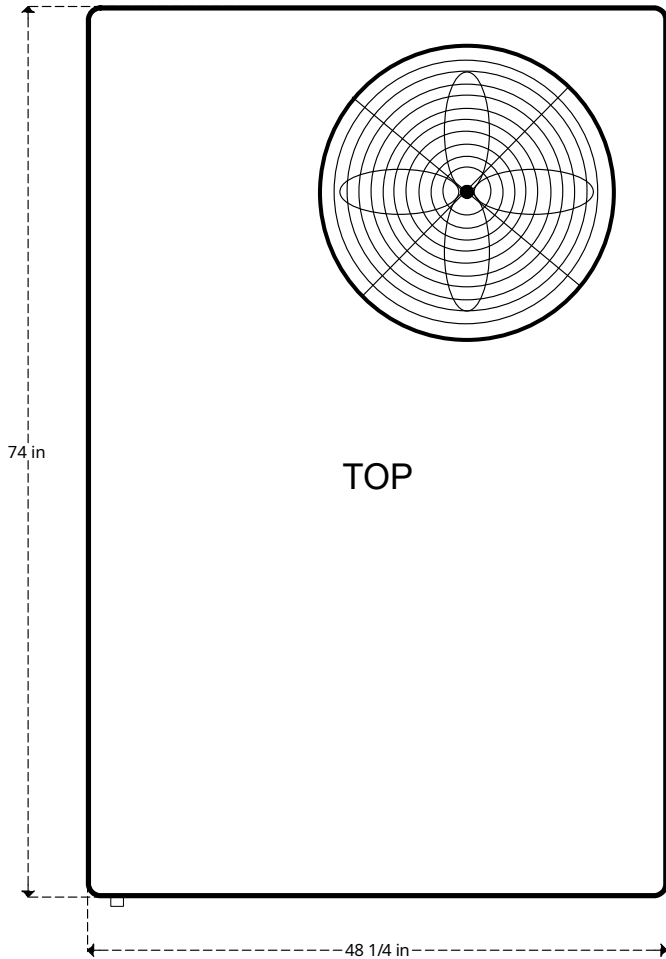

FRONT

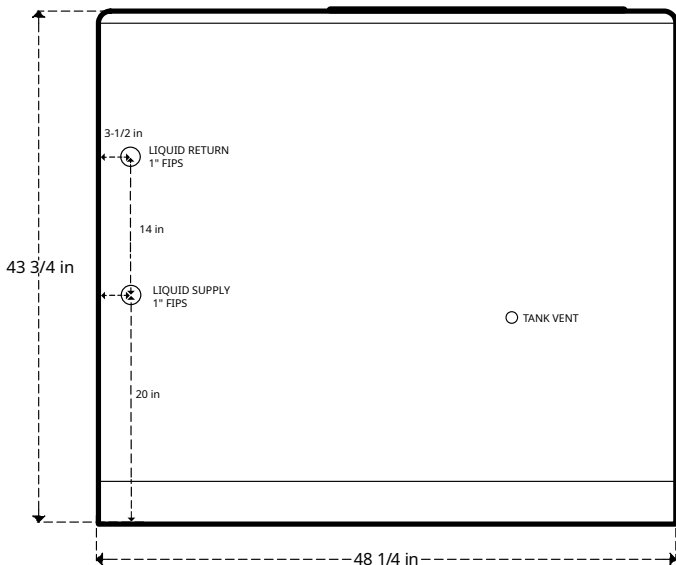

REAR

