

MODEL CXVA090CRS4CR


SPECIFICATIONS:

- Low temperature chiller
- 90,000 BTU/HR at 90F ambient and 55F water out
- *45,000 BTU/HR at 90F ambient and 28F water out (With LT)*
- Electrical: 460V, 60hz three phase
- Minimum Circuit Ampacity: 25, Maximum Fuse Size 35 Amps
- (1) 40G insulated stainless steel tank
- (1) 1-1/2 HP water pump: 59 GPM max, 51 PSI max
- Fully charged with R-32 refrigerant and load tested
- (2) Copeland scroll compressors
- Shipping weight: 776 LBS (approx)
- Dimensions: 41-1/2" wide, 41-1/2" long, 69-1/2" tall
- Decibels: 76


* OPTIONS:

- Low Temp (28F LWT)
- Expansion Ports
- Low Level Alarm
- Upgraded Insulation
- Controller Extension (+15')
- External Drain Port
- High Pressure Bypass Valve
- 2-Stage Controller

TOP

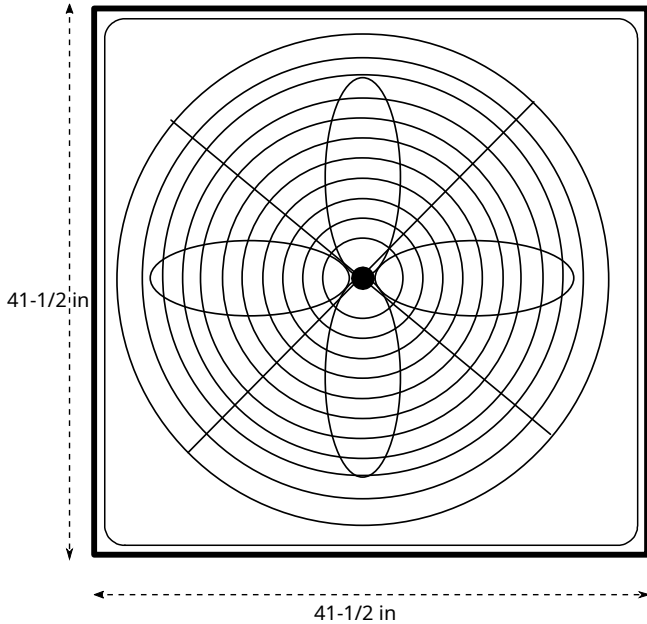

FRONT

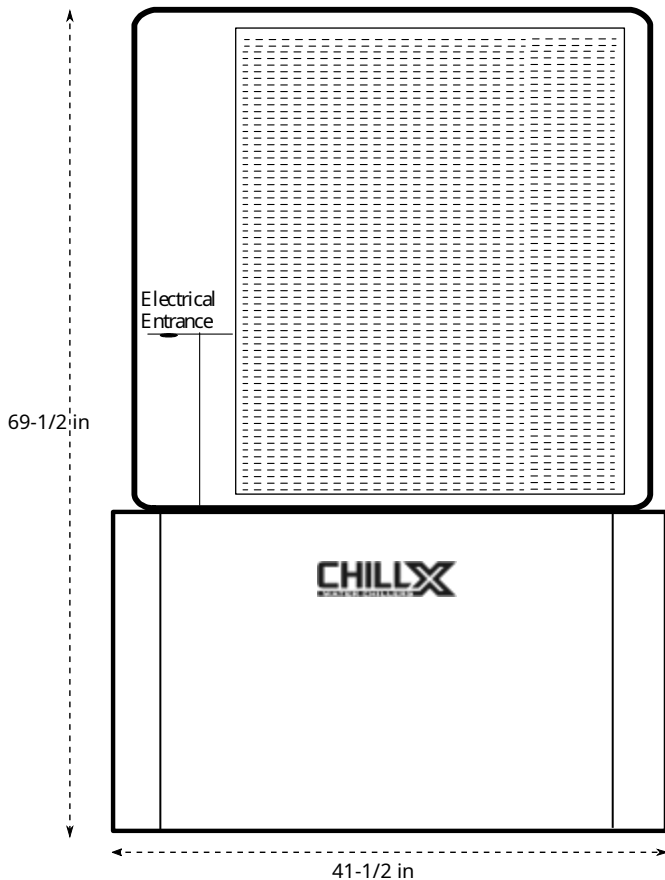

RIGHT

