


MODEL CXVA072CRD3CR

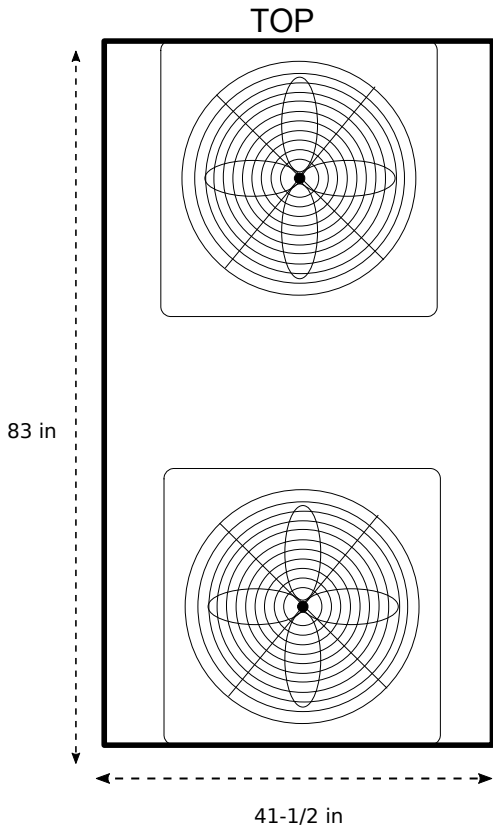

SPECIFICATIONS:

- 72,000 BTU/HR at 55F LWT and 90F ambient
- 36,000 BTU/HR at 28F LWT and 90F ambient (With LT Upgrade)
- Electrical: 208/230V, 60hz three phase
- Minimum Circuit Ampacity: 33, Maximum Fuse Size 43 Amps
- (1) 80G insulated stainless steel tank
- (1) 1-1/2 HP water pump: 59 GPM max, 51 PSI max
- R410a Refrigerant
- (2) Copeland scroll compressors
- Approximate shipping weight 1,000 LBS
- Dimensions: 41-1/2" wide, 83" long, 60-1/2" tall
- Decibels: 77

OPTIONS:

- Low Temp (LWT 28F)
- Extra Insulation
- Expansion Ports
- Low Level Alarm
- Custom Pump

